


TORQUE RANGE

STEP ANGLE	SIZE	WINDINGS	MODEL	TORQUE (mN.m) *FREQUENCY at 1,000pps															
				0	50	100	200	300	400	600	800	1000	1500	2000					
1.8°	60mm	Unipolar	60D1	[Torque range bar from 600 to 800]															
			60D3	[Torque range bar from 800 to 1000]															
			60D4	[Torque range bar from 1000 to 1500]															
			60D5	[Torque range bar from 1500 to 2000]															


PULL OUT TORQUE CURVE

SST60D1XXX

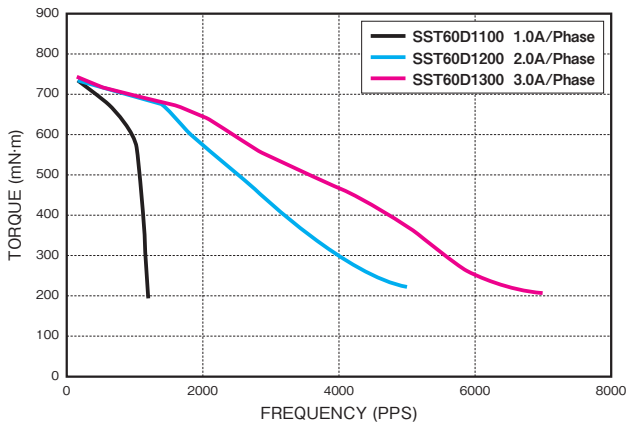


DRIVER : Chopper
 SUPPLY VOLTAGE : DC24V
 EXCITING MODE = 2 Phase
 MOUNTING : With rubber damper

SST60D3XXX

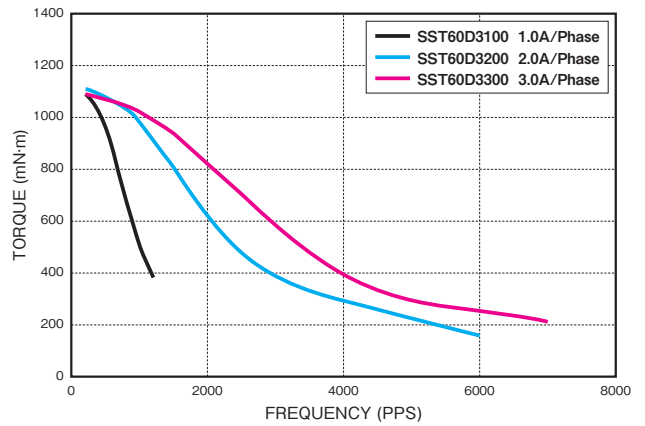


DRIVER : Chopper
 SUPPLY VOLTAGE : DC24V
 EXCITING MODE = 2 Phase
 MOUNTING : With rubber damper

SST60D4XXX

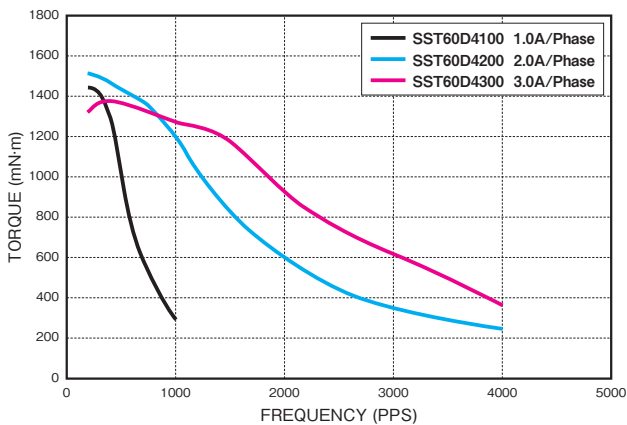

DRIVER : Chopper
 SUPPLY VOLTAGE : DC24V
 EXCITING MODE = 2 Phase
 MOUNTING : With rubber damper

SST60D5XXX

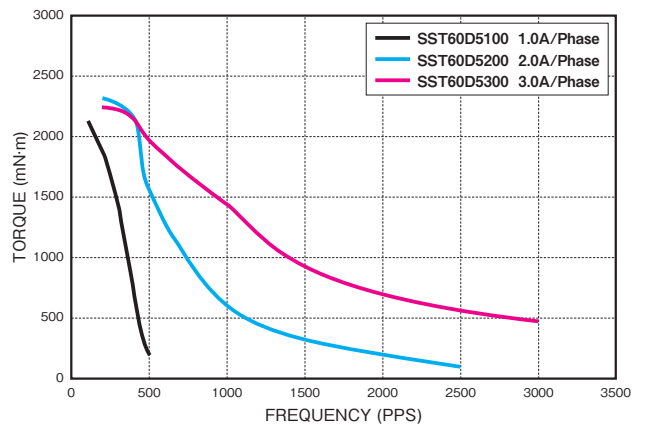

DRIVER : Chopper
 SUPPLY VOLTAGE : DC24V
 EXCITING MODE = 2 Phase
 MOUNTING : With rubber damper

i Available shaft, lead wires, winding, encoder and other customization. Feel free to contact sales office or sales agent.

! Operate the motor keeping the motor surface temperature at 100 deg. C or lower.

Stepping Motor
BLDC Motor
Motor Driver
Other Motor